
FOOD WASTE DISPOSERS

BE INSTALLATION READY



TO ENSURE THAT THE INSTALLATION OF YOUR FOOD WASTE DISPOSER GOES SMOOTHLY, PLEASE ENSURE THE FOLLOWING:

1. Any non-wooden work surface must have a pre-drilled hole (33mm for an air switch)
2. A 13- amp power socket must be within 600mm of install area and accessible
3. There is sufficient space for the product (check website for dimensions)
4. The sink hole must be 90mm wide
5. Be aware that you may lose the shelf in the cupboard
6. Sinks greater than 19mm thick will require an extended flange (available online)
7. The sink overflow is external with a pipe connection
8. Distance from bottom of the sink to the centre of the waste pipe must be a minimum of 280mm or 355mm with batch feed

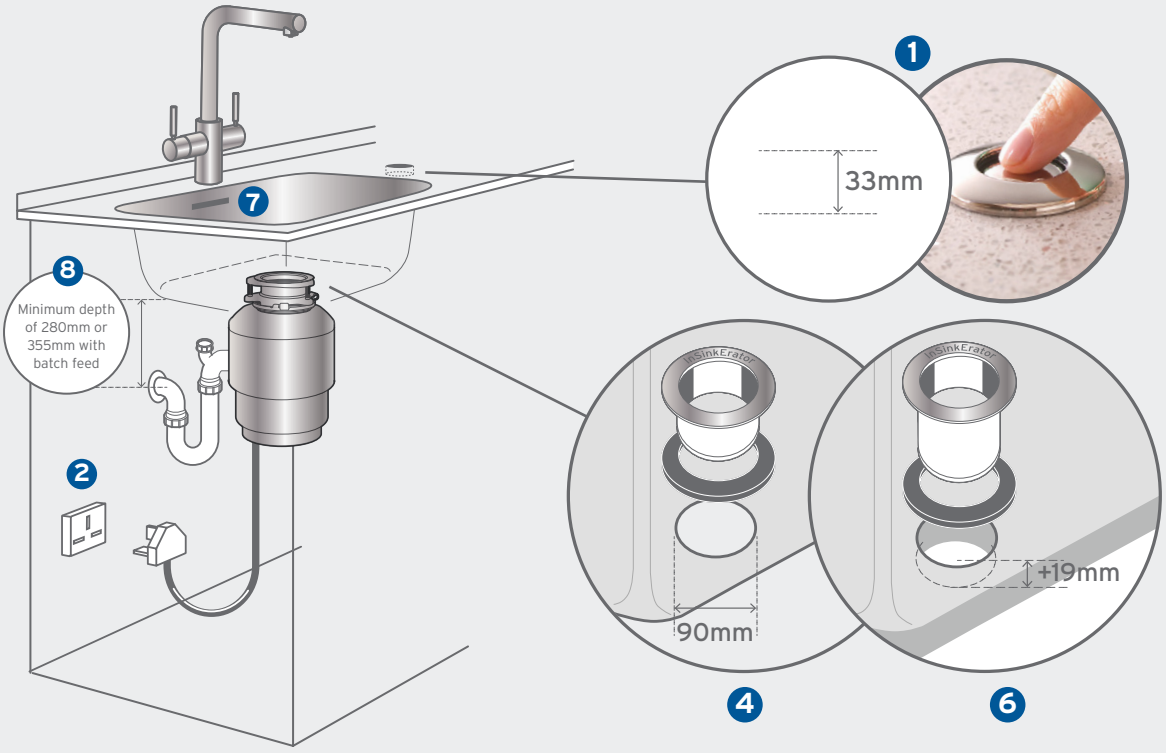

ANY QUESTIONS? GET IN TOUCH ON 0800 389 3715

(81% of calls answered within 20 seconds*)
Lines open Monday-Friday, 9am-6pm

*Genesys Inbound Call Statistics 2024

Please note: the installer will only be able to connect your food waste disposer to your existing services only. If your work surface is made of a material other than wood and does not have a predrilled hole for the air switch, installation will not be possible (unless your switch is to be mounted under the sink, inside the cabinet).

If the above criteria haven't been met when the installer arrives, you will still have to pay a call out charge of £85.

InSinkErator UK Ltd
Registered Office: Building 2 - First Floor,
Croxley Park, Watford WD18 8YA

insinkerator